
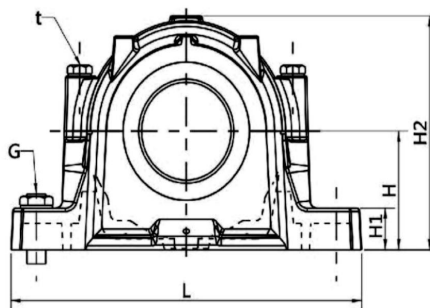
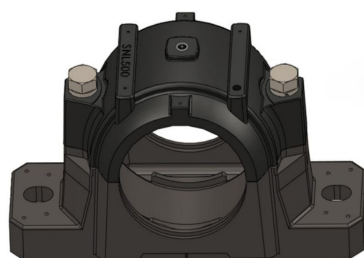


轴承型号	轴径 SHAF T DIA	外形尺寸 (mm) Dimensions (in) or (mm)													G	WEI GHT	Applicable bearings and accessories				SEAL
BEARING NO.	dmm	Da H8	H h13	J	A	L	A1	H1	H2	Ca H13	t	N	N1	BEARING			BEARING	ADAPTER SLEEVE	LOCATING RING		
SNL505	20	52	40	130	67	165	46	19	74	25	M10	15	20	M12	1.5	1205K/2205K	22205K	H205/H305	FRB 5/52 (2) FRB 3.5/52 (2)	TSN 505G	
SNL506-605	25	62	50	150	77	185	52	22	89	32	M10	15	20	M12	2	1206K/2206K	22206K	H206/H306	FRB 8/62 (2) FRB 6/62 (2)	TSN 506G	
SNL507-606	30	72	50	150	82	185	52	22	93	34	M10	15	20	M12	2.2	1207K/2207K	22207K	H207/H307	FRB 8.5/72 (2) FR B 5.5/72 (2)	TSN 507G	
SNL508-607	35	80	60	170	85	205	60	25	108	39	M10	15	20	M12	2.8	1208K/2208K	22208K	H208/H308	FRB 10.5/80 (2) F RB 8/80 (2)	TSN 508G	
SNL509	40	85	60	170	85	205	60	25	109	30	M10	15	20	M12	3	1209K/2209K	22209K	H209/H309	FRB 5.5/85 (2) FR B 3.5/85 (2)	TSN 509G	
SNL510-608	45	90	60	170	90	205	60	25	113	41	M10	15	20	M12	3.1	1210K/2210K	22210K	H210/H310	FRB 10.5/90 (2) F RB 9/90 (2)	TSN 510G	
SNL511-609	50	100	70	210	95	255	70	28	128	44	M12	18	23	M16	4.5	1211K/2211K	22211K	H211/H311	FRB 11.5/100 (2) FRB 9.5/100 (2)	TSN 511G	
SNL512-610	55	110	70	210	105	255	70	30	134	48	M12	18	23	M16	5	1212K/2212K	22212K	H212/H312	FRB 13/110 (2) FR B 10/110 (2)	TSN 512G	
SNL513-611	60	120	80	230	110	275	80	30	149	51	M12	18	23	M16	6.1	1213K/2213K	22213K	H213/H313	FRB 14/120 (2) FR B 10/120 (2)	TSN 513G	
SNL515-612	65	130	80	230	115	280	80	30	155	56	M12	18	23	M16	6.5	1215K/2215K	22215K	H215/H315	FRB 15.5/130 (2) FRB 12.5/130 (2)	TSN 515G	
SNL516-613	70	140	95	260	120	315	90	32	177	58	M12	22	27	M20	9	1216K/2216K	22216K	H216/H316	FRB 16/140 (2) FR B 12.5/140 (2)	TSN 516G	
SNL517	75	150	95	260	125	320	90	32	183	61	M12	22	27	M20	10.2	1217K/2217K	22217K	H217/H317	FRB 16.5/150 (2) FRB 12.5/150 (2)	TSN 517G	
SNL518-615	80	160	100	290	140	345	100	35	194	65	M16	22	27	M20	12.4	1218K/2218K	22218K/23218K	H218/H318/ H2318	FRB 17.5/160 (2) FRB 12.5/160 (2) FRB 6.25/160 (2)	TSN 518G	

SNL519-616	85	170	112	290	145	345	100	35	212	68	M16	22	27	M20	13. 5	1219K/2219K	22219K	H219/H319	FRB 18/170 (2) FR B 12. 5/170 (2)	TSN 519G
SNL520-617	90	180	11	320	160	380	110	40	218	70	M20	26	32	M24	17. 5	2220K	22220K/23220K	H320/H2320	FRB 12/180 (2) FR B 4. 85/180 (2)	TSN 520G
SNL522-619	100	200	125	350	175	410	120	45	242	80	M20	26	32	M24	20. 5	2222K	22222K/23222K	H322/H2322	FRB 13. 5/200 (2) FRB 5. 1/200 (2)	TSN 522G
SNL524-620	110	215	140	350	185	410	120	45	271	86	M20	26	32	M24	25. 5		22224K/23224K	H3124/H2324	FBB 14/215 (2) FR B 5/215 (2)	TSN 524G
SNL526	115	230	150	380	190	445	130	50	290	90	M24	28	36	M24	33		22226K/23226K	H3126/H2326	FRB 13/230 (2) FR B 5/230 (2)	TSN 526G
SNL528	125	250	150	420	205	500	150	50	302	98	M24	33	42	M30	42		22228K/23228K	H3128/H2328	FRB 15/250 (2) FR B 5/250 (2)	TSN 528G
SNL530	135	270	160	450	220	530	160	60	323	106	M24	33	42	M30	53		22230K/23230K	H3130/H2330	FBB 16. 5/270 (2) EBB 5/270 (2)	TSN 530G
SNL532	140	290	170	470	235	550	160	60	344	114	M24	33	42	M30	55		22232K/23232K	H3132/H2332	EBB 17/290 (2) FR B 5/290 (2)	TSN 532G

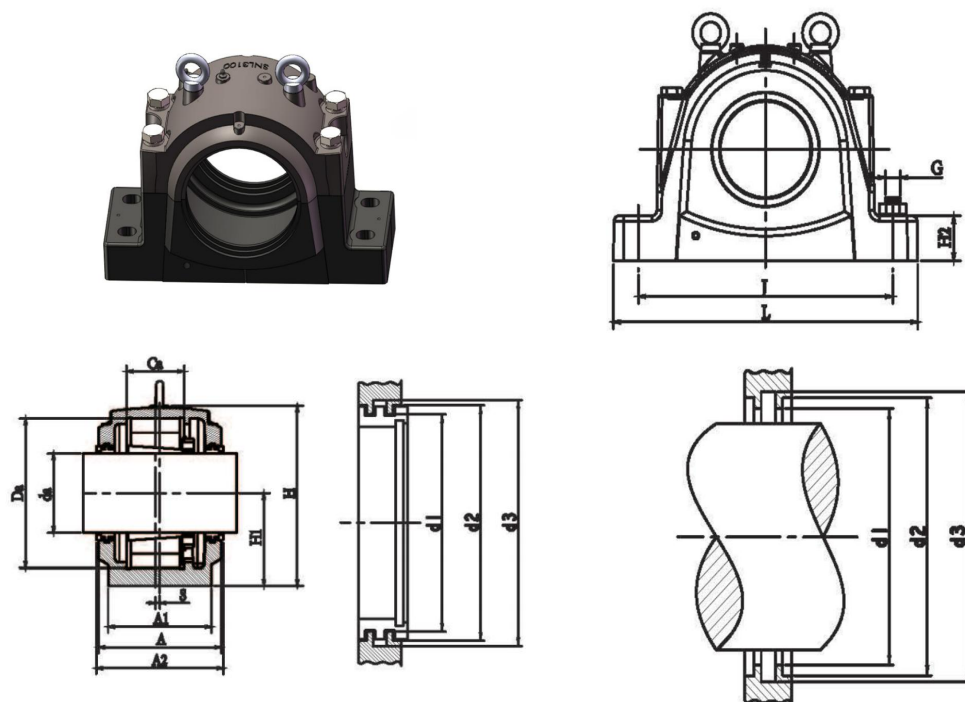

轴承型号	轴径 SHAF T DIA	外形尺寸 (mm) Dimensions (in)or(mm)																	WEI GHT	Applicable bearings and accessories			SEAL		
BEARING NO.	dmm	Da H8	d1H1 2	d2H1 2	d3H12	H1h13	J	J1	A	A2	L	A1	H2	H	Ca H13	N	N1	G		S	BEARING	ADAPTER SLEEVE		LOCATING RING	
SNL3134	150	280	171.2	186.4	195.2	170	460	100	230	240	510	180	70	333	108	34	28	M24	14	M16	69.5	23134K	H3134	FRB10/280 (2)	TS34
SNL3136	160	300	181.2	196.4	205.2	180	450	110	240	250	530	190	75	353	116	34	28	M24	15	M16	77.5	23136K	H3136	FRB10/300 (2)	TS36
SNL3138	170	320	191.4	206.4	215.4	190	480	120	260	270	560	210	80	375	124	34	28	M24	10	M20	97.5	23138K	H3138	FRB10/320 (2)	TS38
SNL3140	180	340	201.4	216.4	225.4	210	510	130	280	290	610	230	82	411	132	42	35	M30	10	M20	123	23140K	H3140	FRB10/340 (2)	TS40
SNL3144	200	370	221.4	236.4	245.4	220	540	140	290	300	640	240	90	434	140	42	35	M30	12	M20	138	23144K	H3144	FRB10/370 (2)	TS44
SNL3148	220	400	241.4	256.4	264.4	240	600	150	310	315	700	260	95	474	148	42	35	M30	12	M24	187	23148K	H3148	FRB10/400 (2)	TS48
SNL3152	240	440	261.6	276.6	285.6	260	650	160	320	330	770	280	100	516	164	50	42	M36	13	M24	221	23152K	H3152	FRB10/440 (2)	TS52
SNL3156	260	460	281.6	296.6	305.6	28	670	160	320	330	790	280	105	551	166	50	42	M36	16	M24	252	23156K	H3156	FRB10/460 (2)	TS56
SNL3160	280	500	301.6	316.8	325.6	300	710	190	350	360	830	310	110	591	180	50	42	M36	22	M30	301	23160K	H3160	FRB10/500 (2)	TS60
SNL3164	300	540	321.8	336.8	345.8	320	750	200	370	380	880	330	115	631	196	50	42	M36	23	M30	339	23164K	H3164	FRB10/540 (2)	TS64
SNL3168	320	580	342.4	357.4	366.4	340	810	220	400	410	950	360	120	675	210	50	42	M36	24	M30	430	23168K	H3168		TS68
SNL3172	340	60	362.4	377.4	386.4	350	840	220	400	410	1000	360	120	695	212	50	42	M36	30	M36	458	23172K	H3172		TS72
SNL3176	360	620	382.4	397.4	406.4	360	870	220	400	410	1040	360	120	715	214	50	42	M36	30	M36	473	23176K	H6176		TS76
SNL3180	380	650	402.8	417.8	426.8	380	950	240	430	440	1120	390	125	775	220	60	48	M42	30	M42	595	23180K	H3180		TS80
SNL3184	90	700	422.8	439.8	446.8	410	1000	260	460	470	1170	420	130	810	244	60	48	M42	35	M42	716	23184K	H3184		TS84